
CAT110E

CATION RESIN



This product has been tested and certified by NSF International against NSF/ANSI Standard 44 for material requirements only.

COMPONENT

Aquatrol CAT110E cation resin

provides a high purity, premium cation resin designed for the treatment of foods, beverages, potable waters, and water used in the processing of food. Aquatrol CAT110E resin is a high grade resin which complies with the U.S. Food & Drug Administration (USFDA) CFR 21, Title 173.25 for use in the treatment of foods for human consumption.

Aquatrol CAT110E cation resin

has excellent hydraulic characteristics for optimal flow rate and backwash flow rates. Its high capacity and porosity characteristic provide exceptional kinetic behavior along with good physical, chemical and thermal stability.



Chemical and thermal stability

Aquatrol CAT110E is insoluble in dilute or moderately concentrated acids, alkalies, and in all common solvents. Thermally stable to higher than 280 °F (138 °C) in alkali's such as, sodium or alkaline earth like calcium and magnesium salt forms.


CAT110E

CATION RESIN


HYDRAULIC PROPERTIES

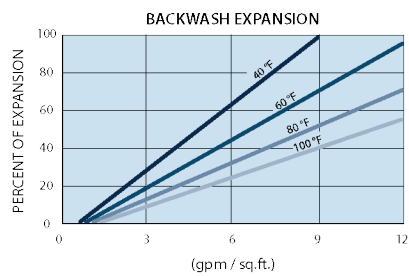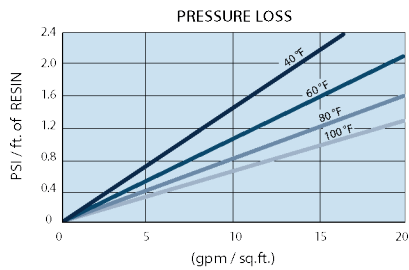

SOFTENING

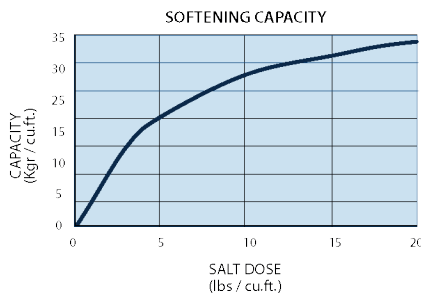

DEMINERALIZATION

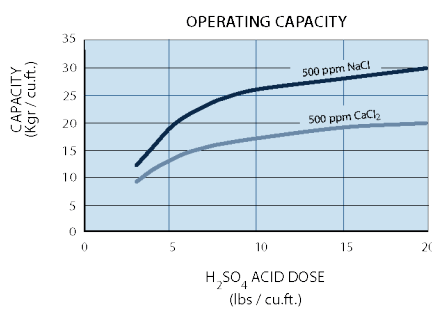

Typical Physical & Chemical Characteristics	
Polymer Matrix Structure	Crosslinked Polystyrene Divinylbenzene
Physical Form and Appearance	Brownish Yellow - Brown, Amber
Whole Bead Count	95% min.
Functional Groups	R-SO ₃
Ionic Form, as shipped	Na ⁺
Screen Size Range - US Standard Screen	16 - 50 mesh, wet
Particle Size Range	+1.2 mm <5%, -0.3 mm <1%
Moisture Retention, Na ⁺ form	46 - 50%
Swelling Na ⁺ → H ⁺	4 - 8%
Specific Gravity, Moist Na ⁺ Form	1.27
Total Exchange Capacity, Na ⁺ Form	
Wet, volumetric	1.9 eq/l min.
Dry, weight	4.5 eq/kg min.
Operating Temperature, Na ⁺ Form	280 °F (138 °C)
pH Range Operating, Na ⁺ Form	0 - 14

FLOW RATE OF REGENERATE SOLUTION

0.5 - 1.5 gpm/cu.ft.

REGENERATE CONTACT TIME

>20 min

RINSE FLOW RATE

1 - 10 gpm/cu.ft.

RINSE TIME

30 min

OPERATING FLOW RATE

1 - 10 gpm/cu.ft.

Backwash Expansion 25% to 50%
Design Rising Space 100%
"Gallons" refer to U.S. Gallon = 3.785 liters

CROSSLINK

10%

APPLICATION

This product is mainly used for softening hard water and preparing pure and high purity water. In addition, it is used in separation and purification of trace elements as well as hydro-metallurgy and pharmaceutical industry.

INTERNATIONAL EQUIVALENTS

- Amberlite SR1L (American)
- Dowex HCR-SS (American)
- Purolite C100, C100E (England)
- Resintech CG10



This product has been tested and certified by NSF International against NSF/ANSI Standard 44 for material requirements only.

COMPONENT

LIT-CAT110E-DS 09/16/19

AQUATROL™
ION EXCHANGE RESIN

AQUATROL | P.O. Box 2235 Chino Hills, CA 91709 • USA

Distributed by: