

UDF Series

GAC / Carbon / Media Filter

- ✓ KDF, Carbon & Cation Resin options
- ✓ Taste, odor and chlorine reduction
- ✓ Available in a variety of sizes
- ✓ High flow design



HYDRONIX UDF SERIES GAC / CARBON / MEDIA FILTERS

are available in 10", 20" lengths, 2.5", 4.5" diameters. Hydronix UDF filters utilize high quality coconut shell carbon, resin and /or KDF (known to be one of the most effective media for removal of organic compounds including VOCs, radon, chlorine, bad taste and odor). Hydronix UDF Series GAC / Carbon / Media Filters combine both quality and reliability at a competitive cost.

2.5" DIAMETER SPECIFICATIONS						
	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	UDF-10	10" GAC, Coconut Shell Carbon	25	14 x 14 x 11	24	10.89
	UDF-10PF	10" GAC, Coconut Shell Carbon with Prefilter	25	14 x 14 x 11	24	10.89
	UDF-10C100E	10" Cation Softening Resin	25	14 x 14 x 11	27	12.25
	UDF-10KDF.5	10" GAC + 1/2 lbs KDF	25	14 x 14 x 11	35	15.88
	UDF-10KDF1	10" GAC + 1 lbs KDF	25	14 x 14 x 11	47	21.32
	UDF-10KDF2	10" GAC + 2 lbs KDF	25	14 x 14 x 11	67	30.39
	UDF-10KDF4	10" ALL 4 lbs KDF	25	14 x 14 x 11	105	47.63
20"	UDF-20	20" GAC, Coconut Shell Carbon	12	14 x 9.5 x 21	27	12.25
	UDF-20C200E	20" Cation Softening Resin	12	14 x 9.5 x 21	43	19.5

4.5" DIAMETER SPECIFICATIONS						
	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	UDF-10BP	10" GAC, Coconut Shell Carbon	12	17 x 17 x 11	20	9.07
20"	UDF-20BP	20" GAC, Coconut Shell Carbon	6	14 x 9.5 x 21	33	14.96

UDF SERIES

GAC / Carbon / Media Filter
Data Sheet

Features & Benefits


- Durable Construction
- Excellent Flow Rate
- Pre/Post Filter Media

Materials of Construction

Filter Media:	Granular Activated Carbon
End Caps:	High Impact
Body:	Polystyrene (Hips)
Gasket:	Buna-N

Operating Data

40 °F to 125 °F (4.4 °C to 51.7 °C)
 Min. Working Pressure: 20 psi
 Max. Working Pressure: 125 psi

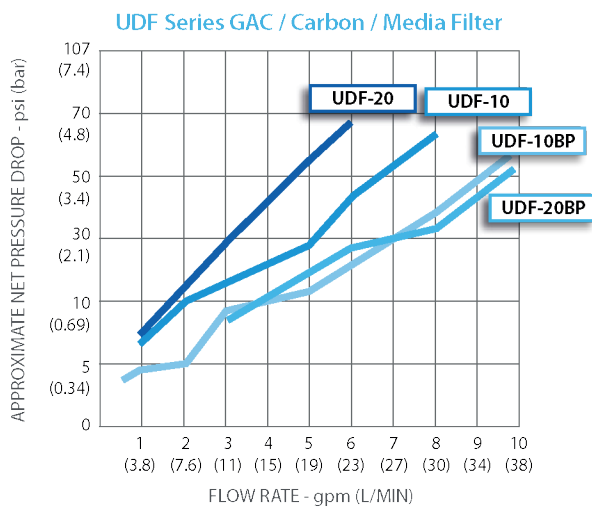

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: A drinking water cartridge may contain carbon fines (very fine black powder). After installation and before using water, follow the instructions for flushing the cartridge to remove fines.

NOTE: It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine reduction is the estimate of capacity using 2 ppm free available chlorine (FAC) at continuous flow greater than 75% reduction.

Distributed by:



HYDRONIX™
 WATER TECHNOLOGY
An American Company

JUST ADD WATER™

P.O. Box 2235 Chino Hills, CA 91709 | USA
 sales@hydronixwater.com • www.HydronixWater.com

LIT-UDF-DS 02/24/21