

www.PumpAgents.com
PumpAgents.com - Click here for Pricing/Ordering

SHURflo®

First in Fluid Innovation

PRODUCT DATA SHEET

MODEL: 8075-142-313

SPECIFICATIONS:

MODEL NUMBER: 8075-142-313

PUMP DESIGN: Positive Displacement 3 Chamber Diaphragm Pump

CAM: 2.5 Degree

MOTOR: Permanent Magnet, P/N 11-169-02

VOLTAGE: 24 VAC Nominal

PRESSURE SWITCH: None

LIQUID TEMPERATURE: 180 Degrees Fahrenheit (82 Degrees Centigrade) Max.

PORTS: 3/8"-18 NPT Female

MATERIAL OF CONSTRUCTION:

PLASTICS- Nylon

VALVES- EPDM

DIAPHRAGM- Santoprene

FASTENERS- Stainless Steel

NET WEIGHT: 4.6 Lbs (2.1 Kg)


DUTY CYCLE: Continuous (See Temperature Rise Chart)

APPROVALS: N.S.F. Listed

TYPICAL APPLICATIONS: R.O. Booster Pump

BYPASS: 95 PSI

DIMENSIONS:

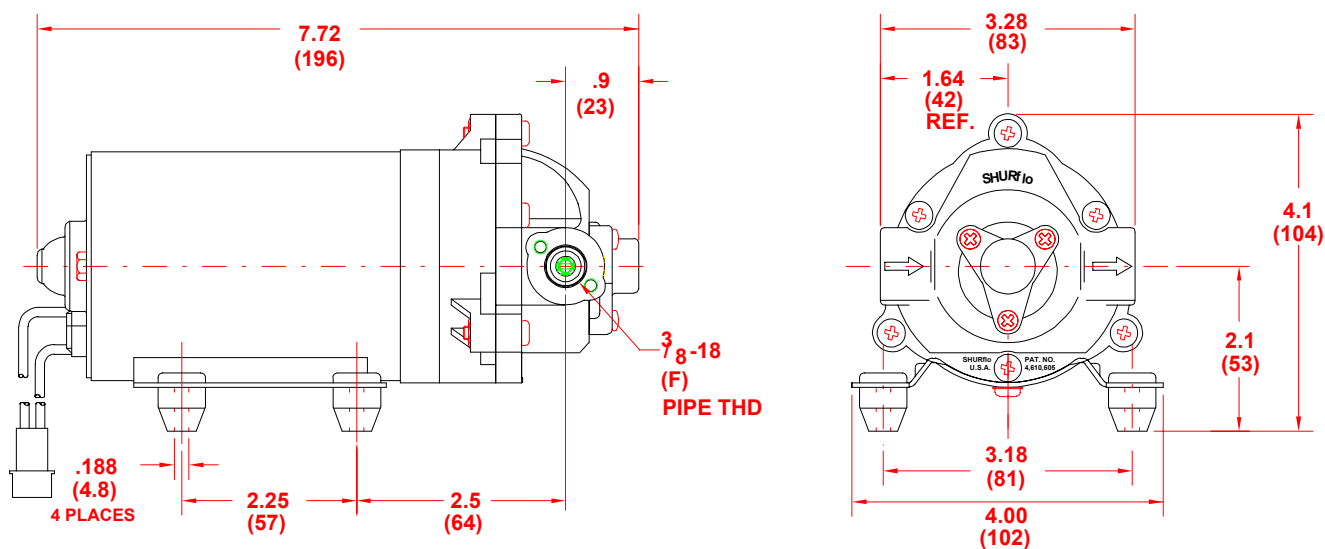

FILE #1231


REVISED:

ISSUED: 2/10/99

PumpAgents.com - buy pumps and parts online


MODEL: 8075-142-313

TEMPERATURE RISE

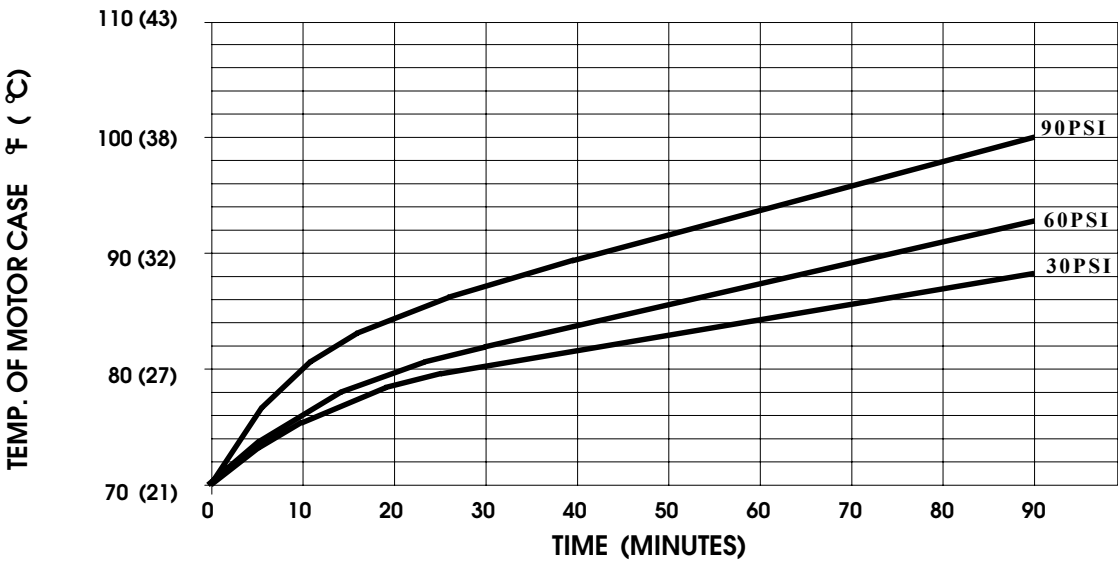

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 70 ° F IN STILL AIR.

TYPICAL PERFORMANCE

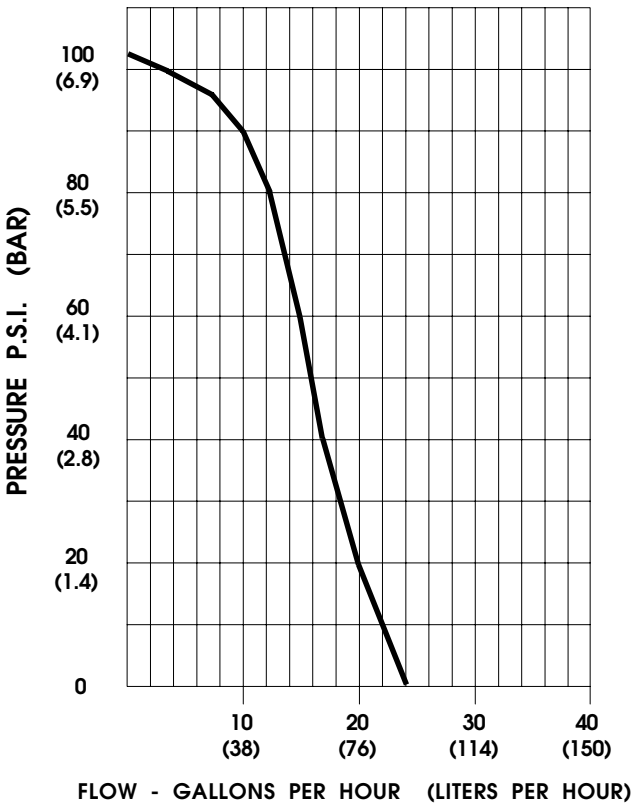

PRESSURE (PSI)	FLOW (GPH/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	25.0/95	650/680	0.24	24 VAC
10	22.0/83	590/625	0.34	"
20	20.0/76	565/580	0.43	"
30	18.0/68	450/538	0.52	"
40	17.0/64	430/502	0.59	"
50	16.0/61	405/465	0.66	"
60	15.0/57	400/428	0.69	"
70	14.0/53	380/388	0.73	"
80	12.0/45	320/335	0.79	"
90	10.0/3.8	310/324	0.93	"

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
PumpAgents.com - buy pumps and parts online

www.PumpAgents.com

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)

PumpAgents.com - buy pumps and parts online