



Tested and certified by NSF International to ANSI/NSF Standard 61 for material requirements only.

# SHOK BLOK

Filter Protection Valve

## Filter Protection Valves

- Kills water hammer
- Limits water pressure
- Available in 40, 60, 70 and 125 PSI limits


### SHOK BLOK™ FILTER PROTECTION VALVES

protect water filtration devices by limiting water pressure and reducing water hammer. They are designed for high pressure installations to protect Reverse Osmosis systems, water filters, ice makers, coffee machines, chillers, hot tanks and water coolers to name a few.

### OPERATING DATA

Flow: 4 Gal/min (15L/min) at 100 PSI  
 Max. Temperature: 104°F (40°C)

Filter Protection Valves 1/4" Tube Inlet/Outlet

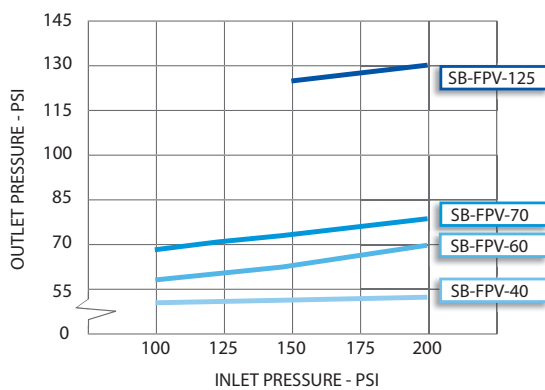

For SB-FPV-40, 60, and 70: Testing Standard Pressure = 100 PSI (Tolerance ± 0.05)  
 For SB-FPV-125: Testing Standard Pressure = 150 PSI (Tolerance ± 0.05)

### SHOK BLOK SERIES PERFORMANCE SPECIFICATIONS

MODEL	PSI SPECIFICATION	MAX. INLET PRESSURE (PSI)	OUTLET PRESSURE (PSI)
SB-FPV-40	40	100	40
	40	150	44
	40	200	50
SB-FPV-60	60	100	60
	60	150	64
	60	200	70
SB-FPV-70	70	100	68
	70	150	72
	70	200	74
SB-FPV-125	125	150	130
	125	250	135
	125	300	140

### SHOK BLOK SERIES SPECIFICATIONS

PART NUMBER	DESCRIPTION	CASE QUANTITY	BOX DIMENSION (IN)	WEIGHT (LBS)	WEIGHT (KGS)
40 PSI	SB-FPV-40	100	8 x 8.5 x 12	16	7.26
	SB-FPV-40/38	100	8 x 8.5 x 12	16	7.26
60 PSI	SB-FPV-60	100	8 x 8.5 x 12	16	7.26
	SB-FPV-60/38	100	8 x 8.5 x 12	16	7.26
70 PSI	SB-FPV-70	100	8 x 8.5 x 12	16	7.26
	SB-FPV-70/38	100	8 x 8.5 x 12	16	7.26
125 PSI	SB-FPV-125	100	8 x 8.5 x 12	16	7.26

Distributed by:

HYDRONIX WATER TECHNOLOGY  
 P.O. Box 2235 Chino Hills, CA 91709 | USA  
 sales@hydronixwater.com • www.HydronixWater.com  
 LIT-SB-DS 09/12/18